

# Datasheet

## **ADVANTECH**

### **PCM-9365**


The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

---

# PCM-9365

**Intel® Atom™ E3825 & Celeron® N2930, 3.5" SBC, 2GB/4GB On-board Memory, VGA, 48-bit LVDS, 2GbE, Mini PCIe, PCI-104, iManager**

**NEW**

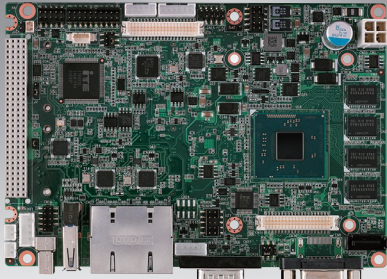

**iManager susiAccess** **CE FCC**

## Features

- Intel® Atom™ E3825 & Celeron® N2930, DDR3L-1066/1333MHz 2GB/4GB on-board memory
- DirectX11, OpenGL3.2, OpenCL1.1, 3 independent display: VGA+LVDS/HDMI+LVDS\*/Dual LVDS
- Support PCI-104 expansion
- 2 GbE, rich I/O: 4COM, SATA, USB3.0, SMBus/I<sup>2</sup>C, GPIO, full-size Mini PCIe, full-size mSATA
- Supports iManager (SUSI 4.0), SUSIAccess and Embedded Software APIs

### Software APIs:



### Utilities:




## Specifications

Processor System	CPU	Intel Celeron N2930	Intel Atom E3825
	Base Frequency	1.83 GHz (Quad-Core)	1.33 GHz (Dual-Core)
	Max Turbo Frequency	2.16 GHz	-
	L2 Cache	2MB	1MB
Memory	BIOS	AMI UEFI BIOS at 64 Mb	
	Technology	DDR3L 1333 MHz	DDR3L 1066 MHz
	Max. Capacity	4 GB	
Display	On-board memory	Yes	
	Controller	Intel Gen7 graphic engine	
	Processor Graphics	DirectX11, OpenGL3.2, OpenCL1.1	
	VGA	Full HW acceleration, decode: H.264, MPEG2/4, VC-1, WMV9. Encode: H.264, MPEG2	
	LVDS	2560 x 1600 at 60Hz	
	HDMI	48-bit dual LVDS up to WUXGA 1920 x 1200 at 60Hz, the 2nd LVDS is supported by request	
Ethernet	Multit-Display	Supports 3.3/5/12V for VDD power, 1A@5V/12V for inverter	
	Speed	HDMI 1.4a for HD video playback, 1080P at 60Hz	
	Controller	VGA + LVDS, HDMI*+ LVDS, LVDS + LVDS*	
Audio	Speed	10/100/1000Mbps	
	Connector	Realtek RTL8111E-VL-CG	
WatchDog Timer	Codec	2 RJ45	
Storage	SATA	Realtek ALC888S, High Definition Audio (HD), Line-in, Line out, Mic-in	
	mSATA	Output System reset, Programmable counter from 1 - 255 minutes/ seconds	
Rear I/O	SATA	1, up to 3Gb/s (300 MB/s)	
	VGA	1 x Full-size	
	HDMI	2 (10/100/1000Mbps)	
	USB 2.0	1	
	USB 3.0	1	
	Serial	1 (support by request)	
Internal I/O	Serial	1 RS232/422/485 support auto flow control	
	USB2.0	3 RS-232 (ESD protection: Air gap ±15kV, Contact ±8kV)	
	I <sup>2</sup> C	4	
	SMBus	1 (Shared with SMBus pin)	
Expansion	GPIO	1	
	Mini PCIe	8-bit	
Power	PCI-104	1 x Full-size	
	Power Type	PCI-104 Expansion	
	Power Supply Voltage	Single 12V DC power input	
	Power Consumption (Typical)	12V ± 10%	
	Power Consumption (Max, test in HCT)	PCM-9365E-2GS3A1E : 0.39A @ 12V (4.68W) PCM-9365EV-4GS3A1E : 0.44A @ 12V (5.28W) PCM-9365N-4GS8A1E : 0.509A @ 12V (6.108W) PCM-9365E-2GS3A1E : 0.49A @ 12V (5.88W) PCM-9365EV-4GS3A1E : 0.554A @ 12V (6.648W) PCM-9365N-4GS8A1E : 0.745A @ 12V (8.94W)	
Environment	Power Management	ACPI	
	Battery	Lithium 3 V / 210 mA	
Physical Characteristics	Operational	0 - 60° C with 0.7m/s air flow (32 - 140° F) (Operational humidity: 40° C @ 95% RH Non-Condensing)	
	Non-Operational	-40° C - 85° C and 60° C @ 95% RH Non-Condensing	
Physical Characteristics	Dimensions (L x W)	146 x 102 mm (5.7" x 4"), same as 3.5"	
	Weight	0.54kg (1.19lb), weight of total package	
	Height	Top Side: 19.5 mm; Bottom Side: 7.8 mm; PCB: 1.6 mm	

\* The specification is supported by request

## Block Diagram

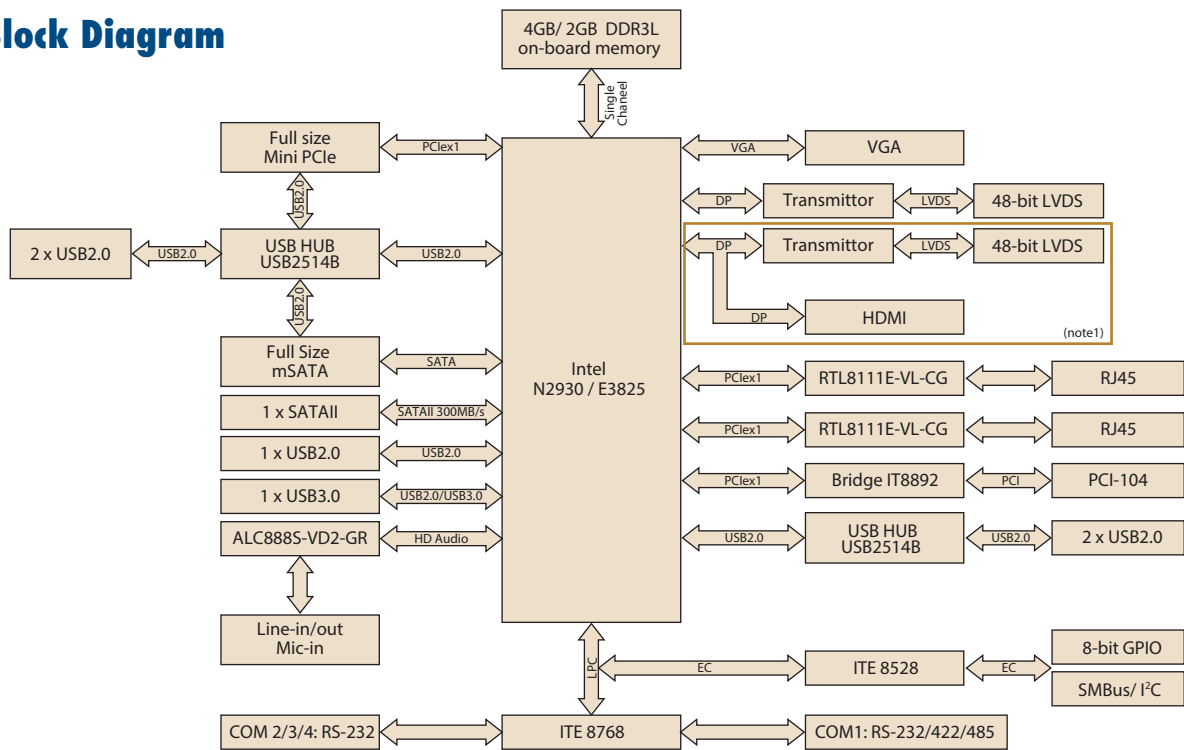

Note1: Supported by request

## Ordering Information

Part No.	CPU	Onboard Memory	LVDS	VGA	GbE	Audio	RS-232/422/485	RS-232	USB 3.0	USB 2.0	SATAII	Mini PCIe	mSATA	PCI-104	Power connector	Thermal Solution*	Operating Temp.
PCM-9365E-2GS3A1E	Intel E3825 1.33GHz 6W	2GB	48-bit	Yes	2	Yes	1	3	1	5	1	Full-size	Full-size	Yes	2x2pin	Passive	0 ~ 60° C
PCM-9365EV-4GS3A1E	Intel E3825 1.33GHz 6W	4GB	48-bit	Yes	2	Yes	1	3	1	5	1	Full-size	Full-size	Yes	2x2pin	Passive	0 ~ 60° C
PCM-9365N-4GS8A1E	Intel N2930 1.83GHz 7.5W	4GB	48-bit	Yes	2	Yes	1	3	1	5	1	Full-size	Full-size	Yes	2x2pin	Passive	0 ~ 60° C
PCM-9365EZ2GS3A1E	Intel E3825 1.33GHz 6W	2GB	48-bit	Yes	2	Yes	1	3	1	5	1	Full-size	Full-size	Yes	2x2pin	Passive	-40 ~ 85° C
PCM-9365NZ24GS8A1E	Intel N2930 1.83GHz 7.5W	4GB	48-bit	Yes	2	Yes	1	3	1	5	1	Full-size	Full-size	Yes	2x2pin	Passive	-40 ~ 85° C

Note: Passive=fanless; Active=with fan

## Packing List

Part No.	Description	Quantity
	PCM-9365 SBC	1
	Startup Manual	1
1701200220	RS-232 COM3/4 cable, F Cable 2*10P-2.0/D-SUB 9P(M)*2 22CM	1
1700018785	SATA 35cm power cable	1
1700019414	RS-232 COM2 Cable D-SUB 9P(M)/2*5P-2.0 30cm	1
1700018730	USB Cable 2*5P-2.0/USB-A(F)*2 25CM F/9	2
1700008941	M Cable SATA 7P/SATA 7P 32CM C=R 180/180D W/Lock	1
1700019584	Audio Cable 2*5P-2.0/JACK*3 20cm	1
9689000002	mini Jumper pack	1
1960067897T001	Heatsink for PCM-9365 (131.24 x 69.21 x 19.5 mm)	1
1960067897T011	Heatsink for PCM-9365Z&Z2 series only (131.24 x 69.21 x 19.5 mm)	1

## Rear I/O View



## Optional Accessories

Part No.	Description
1960070254T001	Heat spreader
1653130421	PCI-104 connector 120-pin (Long pin)

## Embedded OS/API

Embedded OS/API	Part No.	Description
WES8	TBD	
WES7	2070013531	WES7E PCM-9365 X64 V5.6.8 Eng
WEC7	TBD	
Linux		Kernel 3.x
VxWorks		6.9.3.3
Android		Kit Kat 4.4
Software API		iManager (SUSI 4.0)

Our company network supports you worldwide with offices in Germany, Great Britain, Turkey and the USA.  
For more information please contact:



## DATA DISPLAY GROUP

A **FORTEC** GROUP MEMBER

### **Distec GmbH**

Augsburger Str. 2b  
82110 Germering  
Germany

Phone: +49 (0)89 / 89 43 63-0  
Fax: +49 (0)89 / 89 43 63-131  
E-Mail: [info@datadisplay-group.de](mailto:info@datadisplay-group.de)  
Internet: [www.datadisplay-group.de](http://www.datadisplay-group.de)

### **Display Technology Ltd.**

5 The Oaks Business Village  
Revenge Road, Lordswood  
Chatham, Kent, ME5 8LF  
United Kingdom  
Phone: +44 (0)1634 / 67 27 55  
Fax: +44 (0)1634 / 67 27 54  
E-Mail: [info@displaytechnology.co.uk](mailto:info@displaytechnology.co.uk)  
Internet: [www.datadisplay-group.com](http://www.datadisplay-group.com)

### **Sales Partner:**

### **DATA DISPLAY BİLİŞİM TEKNOLOJİLERİ İÇ VE DIŞ TİCARET LİMİTED ŞİRKETİ**

Barbaros Mh. Ak Zambak Sk. A Blok D:143  
34376 Ataşehir / Istanbul  
Turkey  
Phone: +90 (0)216 / 688 04 68  
Fax: +90 (0)216 / 688 04 69  
E-Mail: [info@data-display.com.tr](mailto:info@data-display.com.tr)  
Internet: [www.data-display.com.tr](http://www.data-display.com.tr)

### **FORTEC Elektronik AG**

Lechwiesenstr. 9  
86899 Landsberg am Lech  
Germany

Phone: +49 (0)8191 / 911 72-0  
Fax: +49 (0)8191 / 217 70  
E-Mail: [sales@fortecag.de](mailto:sales@fortecag.de)  
Internet: [www.fortecag.de](http://www.fortecag.de)

### **Apollo Display Technologies, Corp.**

87 Raynor Avenue,  
Unit 1 Ronkonkoma,  
NY 11779  
United States of America  
Phone: +1 631 / 580-43 60  
Fax: +1 631 / 580-43 70  
E-Mail: [info@apolloDisplays.com](mailto:info@apolloDisplays.com)  
Internet: [www.apolloDisplays.com](http://www.apolloDisplays.com)